


CAT 6A U/UTP 23 AWG PREMIUM CCA DJ AR & AT CABLE

WIAN provide an array of Cat6A U/UTP Cables with different conductor sizes, tailored to meet every Ethernet requirement. Our Cat 6A Cables boast compatibility with data rates of up to 10 Gbps, making them the prime selection for LAN/WAN Solutions. Each cable comprises 8 copper conductors, with 2 conductors intricately twisted to forge a pair. The amalgamation of 4 pairs, sheathed with FR grade material, ensures unparalleled performance and durability

- Cable Type : U/UTP
- Category : Cat6A
- No. of Pairs : 4

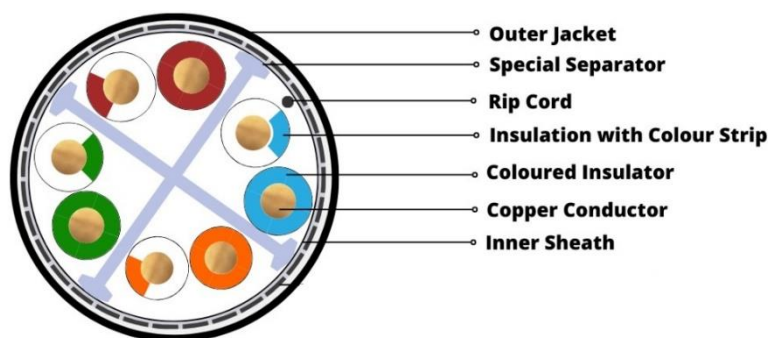

Physical Construction:

• Conductor Type	Solid Bare Premium CCA
• Conductor Size	23 AWG
• Insulation	Polyolefin
• Insulation Diameter	1.04 mm ± 0.05 mm
• Pairing	Twisted into two core
• Noise Protection	Special Noise Barrier Tape & Special Cross Separator
• Inner Sheath	FR-PVC
• Outer Sheath	PE with AR, AT & UV Properties
• Color of Sheath	Black
• Cable Diameter	7.6 mm ± 0.5 mm
• Printing	Product details with Meter Marking

Electrical Properties:

• Conductor Resistance (Ω/km)	150 (Max)
• Mutual Capacitance (nF/100 M)	5.6 (Max)
• Resistance Unbalance (%)	5 (Max)
• Worst Delay Skew (ns/100 M)	≤ 45
• NVP (%)	69

Mechanical Properties:

• Bending Radius	≤ 8 x Cable Diameter
• Installation Temperature	0 to +50 °C
• Operating Temperature	-15 to +75 °C
• Pulling Force	100 N

Pair Identification Colour Code:

Pair#1-2	White	Orange	Orange
Pair#3-6	White	Green	Green
Pair#4-5	White	Blue	Blue
Pair#7-8	White	Brown	Brown

High Frequency Electrical Properties:

Frequency (MHZ)	IL dB	NEXT dB	PSNEXT dB	ACRF dB	PSACRF dB	RL dB
	Max	Min.	Min.	Min.	Min.	Min
1	2.3	65.0	62.0	63.3	60.3	19.0
4	4.2	63.0	60.5	51.2	48.2	19.0
8	5.8	58.2	55.6	45.2	42.2	19.0
10	6.5	56.6	54.0	43.3	40.3	19.0
16	8.2	53.2	50.6	39.2	36.2	18.0
20	9.2	51.6	49.0	37.2	34.2	17.5
25	10.2	50.0	47.3	35.3	32.3	17.0
31.25	11.5	48.4	45.7	33.4	30.4	16.5
62.5	16.4	43.4	40.6	27.3	24.3	14.0
100	20.9	39.9	37.1	23.3	20.3	12.0
200	30.1	34.8	31.9	17.2	14.2	9.0
250	33.9	33.1	30.2	15.3	12.3	8.0
300	37.4	31.7	28.8	13.7	10.7	7.2
400	43.7	28.7	25.8	11.2	8.2	6.0
500	49.3	26.1	23.2	9.3	6.3	6.0

Ref Standard:

- ANSI/TIA-568.2-D
- ISO/IEC 11801 2ND Edition
- IEC 60332-1
- IEC 61156-5

Packing Standard:

- Packing Style : Wooden Reel
- Packing Length : Available in 305 meter length