


WC-2274K CAT 6A U/UTP 23 AWG AL ARMD CABLE

WIAN provide an array of Cat6A U/UTP Cables with different conductor sizes, tailored to meet every Ethernet requirement. Our Cat 6A Cables boast compatibility with data rates of up to 10 Gbps, making them the prime selection for LAN/WAN Solutions. Each cable comprises 8 copper conductors, with 2 conductors intricately twisted to forge a pair. The amalgamation of 4 pairs, sheathed with FR grade material, ensures unparalleled performance and durability

- Cable Type : U/UTP
- Category : Cat6A
- No. of Pairs : 4

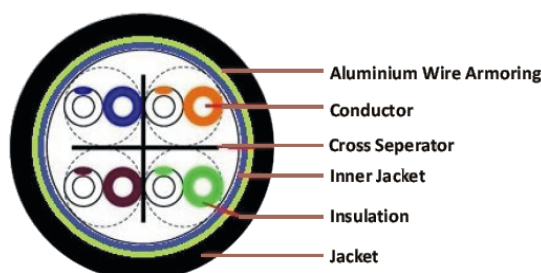

Physical Construction:

• Conductor Type	Solid Bare Electrolytic Grade Copper
• Conductor Size	23 AWG
• Insulation	Polyolefin
• Insulation Diameter	1.04 mm ± 0.05 mm
• Pairing	Twisted into two core
• Separator	Special Noise Barrier Cross Separator
• Noise Barrier Tape	Coverage 100%
• Inner Sheath	FR-PVC (Special Teeth design)
• Armoring	Al Wire (24 x 0.7 mm +/- 0.2 mm)
• Outer Sheath	PE with UV Properties
• Color of Sheath	Black
• Cable Diameter	9.4 mm ± 0.5 mm
• Printing	Product details with Meter Marking

Electrical Properties:

• Conductor Resistance (Ω/km)	93.8 (Max)
• Mutual Capacitance (nF/100 M)	5.6 (Max)
• Resistance Unbalance (%)	5 (Max)

Mechanical Properties:

• Bending Radius	≤ 8 x Cable Diameter
• Installation Temperature	0 to +50 °C
• Operating Temperature	-15 to +75 °C
• Pulling Force	100 N

Pair Identification Colour Code:

Pair#1-2	White	Orange	Orange
Pair#3-6	White	Green	Green
Pair#4-5	White	Blue	Blue
Pair#7-8	White	Brown	Brown

High Frequency Electrical Properties:

Frequency	IL	NEXT	PSNEXT	ACRF	PSACRF	RL
(MHZ)	dB	dB	dB	dB	dB	dB
	Max	Min.	Min.	Min.	Min.	Min
1	2.3	65.0	62.0	63.3	60.3	19.0
4	4.2	63.0	60.5	51.2	48.2	19.0
8	5.8	58.2	55.6	45.2	42.2	19.0
10	6.5	56.6	54.0	43.3	40.3	19.0
16	8.2	53.2	50.6	39.2	36.2	18.0
20	9.2	51.6	49.0	37.2	34.2	17.5
25	10.2	50.0	47.3	35.3	32.3	17.0
31.25	11.5	48.4	45.7	33.4	30.4	16.5
62.5	16.4	43.4	40.6	27.3	24.3	14.0
100	20.9	39.9	37.1	23.3	20.3	12.0
200	30.1	34.8	31.9	17.2	14.2	9.0
250	33.9	33.1	30.2	15.3	12.3	8.0
300	37.4	31.7	28.8	13.7	10.7	7.2
400	43.7	28.7	25.8	11.2	8.2	6.0
500	49.3	26.1	23.2	9.3	6.3	6.0

Ref Standard:

- ANSI/TIA-568.2-D
- ISO/IEC 11801 2ND Edition

Packing Standard:

- Packing Style : Wooden Reel
- Packing Length : Available in 305 meter length